

# Genie® AWP™-20S, AWP-25S, AWP-30S, AWP-36S & AWP-40S

## Specifications

Modelle	AWP-20S	AWP-25S	AWP-30S	AWP-36S	AWP-40S
Working height max. <sup>(1)</sup>	8.10 m	9.50 m	11.0 m	13.10 m	14.30 m
Platform height	6.10 m	7.50 m	9.00 m	11.10 m	12.30 m
<b>A</b> Height - stowed (standard)	1.98 m	1.98 m	1.98 m	2.78 m	2.78 m
<b>B</b> Height Tilted back <sup>(2)</sup> (standard)	-	-	-	1.92 m	1.98 m
<b>C</b> Length - stowed (standard)	1.24 m	1.31 m	1.35 m	1.40 m	1.42 m
<b>D</b> Length - tilted back <sup>(2)</sup>	-	-	-	2.97 m	2.97 m
<b>E</b> Width	0.74 m	0.74 m	0.74 m	0.74 m	0.74 m

## Productivity

Lift capacity	159 kg	159 kg	159 kg	159 kg	136 kg
<b>F</b> <b>G</b> Outrigger footprint (l/w) (standard)	1.55/1.35 m	1.75/1.55 m	1.93/1.73 m	2.12/1.91 m	2.26/2.06 m
<b>H</b> Corner access <sup>(3)</sup> (standard)	0.38 m	0.48 m	0.56 m	0.74 m	0.79 m
<b>I</b> <b>J</b> Wall access front/side (standard)	0.15/0.33 m	0.18/0.43 m	0.20/0.53 m	0.36/0.64 m	0.38/0.71 m
Standard platform dimensions (l/w/h)	0.69/0.66/1.14 m	0.69/0.66/1.14 m	0.69/0.66/1.14 m	0.69/0.66/1.14 m	0.69/0.66/1.14 m
Gated standard platform dimensions (l/w/h)	0.69/0.66/1.14 m	0.69/0.66/1.14 m	0.69/0.66/1.14 m	0.69/0.66/1.14 m	0.69/0.66/1.14 m
Gated narrow platform dimensions (l/w/h)	0.66/0.51/1.14 m	0.66/0.51/1.14 m	0.66/0.51/1.14 m	0.66/0.51/1.14 m	0.66/0.51/1.14 m

## Weight and Floor Loading<sup>(4)</sup>


AC models	307 kg	330 kg	352 kg	461 kg	472 kg
DC models	347 kg	371 kg	393 kg	502 kg	513 kg
Occupied floor pressure	2.40 kPa	1.90 kPa	1.65 kPa	1.60 kPa	1.37 kPa

## Power

Power source - AC models	110V/50-60 Hz
	220V/50-60 Hz
Power source - DC models	12V DC

## Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA
Sound Pressure level (platform workstation)	< 70 dBA
Vibrations	< 2.5 m/s <sup>2</sup>

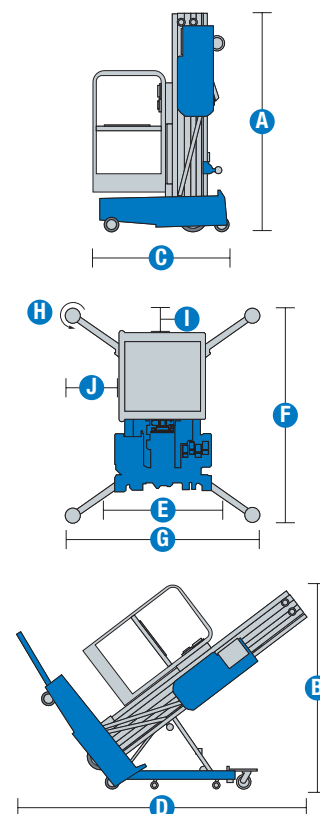

(1) The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.

(3) Weight refers to standard configuration and may vary depending on options and/or country standards.

(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

# Genie® AWP™-20S, AWP-25S, AWP-30S, AWP-36S & AWP-40S

## SKU: Stock Models

- AWP-20S, AC Power\*
- AWP-25S, AC Power\*
- AWP-30S, AC Power\*
- AWP-36S, AC Power with Tilt-back frame\*
- AWP-40S, AC Power with Tilt-back frame\*

\* Build to Order

## SKU: Stock Models

- AWP-20S, DC Power\*
- AWP-25S, DC Power\*
- AWP-30S, DC Power\*
- AWP-36S, DC Power with Tilt-back frame\*
- AWP-40S, DC Power with Tilt-back frame\*

Option availability		S	S+	BtO
Power	AC 85V power			○
	Wet battery (DC - only for AWP-30S)			✓
	AC 110V power			○
	Dry battery (DC)			○
	AC 220V power			○
	DC Power			✓
	12V 110/230V 50-60Hz worldwide smart charging system			✓
Platform	Sliding mid-rail standard platform			✓
	Gated standard platform			○
	Gated narrow platform			○
	Descent light and alarm package			○
	Tool tray			○
	AC power to platform			✓
Chassis	Standard base for all models			✓
	Lift Guard White Noise Alarm			○
	Auxiliary platform lowering			✓
	Crane attachment point			✓
	Easy operation: rolls through standard doorways			✓
	Fast load into pickup trucks			✓
	Forklift pockets (Standard base only)			✓
	Ground fault interrupt			✓
	Heavy-duty design and mast			✓
	LED lights confirm proper set-up			✓
	Outrigger storage pockets			✓
	Rocker base system for maneuverability			✓
	Standard outriggers			✓
	Tie-down attachment points			✓

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options




Lightweight



Easy to Load and Transport



Low Floor Loading

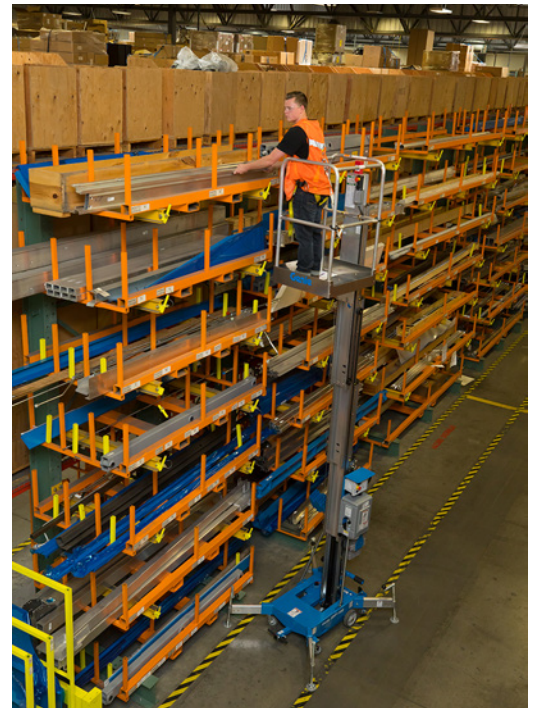

## Genie Genuine Accessories<sup>(1)</sup>

- Platform-locating laser light
- Fluorescent tube caddy

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

09/23



QUALITY BY DESIGN