# **GENIE® ACCESSORIES** CUSTOMIZE YOUR EQUIPMENT FOR THE JOB







# Genie Accessories Table of Contents

Table of Contents	2
Genie Accessories Introduction	3
Genie Boom Lift Accessories	
Tech Pro <sup>™</sup> Link	4
4 m (13 ft) Platform	4
Load Sense Calibration Kit	5
Light Package	5
Auxiliary Rail	5
Platform Control Box Cover	6
Tool Tray	6
Aircraft Protection Package	6
Lift Tools <sup>™</sup> Pipe Cradle	7
Lift Tools Panel Cradle	7
Lift Guard <sup>™</sup> Contact Alarm	8
Lift Guard OPS	8
Lift Guard Fall Arrest Bar	8
Lift Guard Platform Full Mesh	9
Lift Guard Platform Half Mesh	9
Genie Scissor Lift Accessories	

#### Genie Scissor Lift Accessories

Tech Pro™ Link	10
Lift Tools Pipe Cradle	10
Lift Tools Panel Carrier	10
Lift Tools Work Tray	11
Lift Tools Spill Guard	11

#### Genie Aerial Work Platform Accessories

Tech Pro Link	12
Extension Deck Platforms	12
Lift Tools Work Tray	12
Standard Platform	13
Standard Base	13
Gated Standard Platform	13
Gated Narrow Platform	13
Fluorescent Tube Caddy	13
Descent Alarm Package	13

#### Genie Material Lift Accessories

	Standard Forks	14
	Adjustable Forks	14
	Flat Forks	14
	Fork Extensions	14
	Boom Option - GL™	14
	Boom Option - SLA™ & SLC™	14
	Load Platform	15
	Captive Stabilizer	15
	Aluminum Ladder	15
	Stair Rollers	15
	Brake Option	15
	Platform Cradle Package	15
	Stair Rollers	15
	Wheels and Casters	16
Lift	Connect Telematics	
	Lift Connect™	17
	Lift Connect Subscription Renewal	17
	Access Manager RFID Card	18
	Access Manager	18
	noocoo managor	10

#### Contact Our Parts Department

Email:	awp.euparts@terex.com
Web:	https://parts.genielift.com/

#### (F) = Factory Installed (A) = Aftermarket

For factory installed options only, no aftermarket kit part number is provided on our parts website, please refer to your Sales Manager Machine quotes. Images for illustration purposes only. Decal appearance may vary.



# Increase Your Productivity

A variety of accessories are available to help maximize safe productivity while operating Genie<sup>®</sup> equipment. It pays to understand what's available so you can set yourself apart. In fact, you count on a selection of practical, adaptable accessories because they are critical – sometimes required – on certain jobsites. Consider what Genie has to offer.



Lift Tools<sup>™</sup> Panel Cradle



### Genie<sup>®</sup> Boom Lift Accessories

Our commitment doesn't end when you purchase a boom. We offer accessories that add to the quality you receive when you choose Genie.



### **⊘** Tech Pro<sup>™</sup> Link

Allows users to monitor a machine's gauges, including engine temperature, oil pressure, fuel levels and battery voltage, calibrate the machine, make speed adjustments during pre-operation inspection, get service alerts and reminders, track maintenance intervals, receive fault code information and so much more – all from the palm of your technician's hand.



### A m (13 ft) Platform\*

This extra-long 4 m (13 ft) long x 0.91 m (3 ft) wide man-platform offers operators the benefit of accessing a much larger working area quickly and easily. Ideally suited for applications such as renovation and painting of buildings, window cleaning and cladding, it offers a 272 kg (600 lb) lift capacity (2 person) and has three sliding mid-rail entries. To be ordered with the Off Center Transport Lock, which allows a machine fitted with this option to remain within the truck perimeter during transport.

PART NO.	AVAILABLE ON
	CAN-enabled control systems: Mid-sized Genie <sup>®</sup> S <sup>®</sup> telescopic Xtra Capacity <sup>™</sup> (XC <sup>™</sup> ) booms.
1276686GT Kit, Tech Pro Link	Genie Booms with a Plus1 control system such as the Z <sup>®</sup> -33/18, Z-40/23 N and Z-60 FE.
	Genie GS <sup>™</sup> scissor lifts & GR's equipped with SmartLink <sup>™</sup> control systems.

PART NO.	AVAILABLE ON
1295770GT	S-45 XC, S-45 TraX <sup>™</sup> , S-65 XC, S-65 TraX
1296096GT	Off-Center Transport Lock Kit for S-65 XC/TraX
1309686GT	Off-Center Transport Lock Kit for S-45 XC/TraX**

\* Use limited to some areas of the range of motion. Some platform options are not allowed to use with the 4 m platform. For more information please refer to the Operator's Manual Supplement.

\*\* Before S45XCH-1198 and S45XCD-405, also order part number 1310431GT Forming, required to be used along with the OCTL.







### O Load Sense Calibration Kit

Calibrate your load sense system to 454 kg (1000 lb), without the hassle of loading weights into the platform. Can be quickly and easily performed in less than 10 minutes by 1 person. The kit contains a carrying case, rigging, scale, chain hoist, and instructions manual.

## Dight Package

For low light work areas or working at night, this accessory consists of two chassis-mounted drive lights and two platform mounted work lights to illuminate the work area.

#### CO Auxiliary Rail

The auxiliary top rail platform accessory is an additional railing system that can be quickly and easily mounted on the outside of a Genie boom's standard platform rails. This railing system adds an extra measure of security for the operator when working at height.

PART NO.	AVAILABLE ON	PART NO.	AVAILABLE ON	PART NO.	AVAILABLE ON
1311358GT	All Genie S <sup>®</sup> boom lifts, Z <sup>®</sup> -45 XC <sup>™</sup> , Z-45 HF, Z-45 FE, Z-45 DC, Z-60 FE, Z-60 DC, ZX <sup>™</sup> -135 XC	Factory Fit	Z-30/20N, Z-33/18, Z-34/22 series, Z-40/23N & Z-40/23N RJ, Z-45/25 series, Z-45 XC, Z-51/30J RT, Z-60 DC & Z-60 FE,	121266GT - 1.83 m (6 ft) platform w/ swing gate	Z-30/20N & Z-30/20N RJ, Z-34/22 series, Z-40/23N & Z-40/23N RJ, Z-45/25 series, Z-45 XC, Z-60 FE,
			Z-62/40, Z-80/60, ZX- 135/70, S-40/45 XC, S-65 XC, S-80/85 XC, SX <sup>™</sup> -105 XC*, SX-125 XC*, SX-135 XC, SX-150, SX-180	121267GT - 2.44 m (8 ft) platform w/ swing gate	Z-51/30J RT, Z-62/40, Z-80/60, ZX-135/70, S-40/45 XC, S-65 XC, S-80/85 XC, SX-105 XC SX-125 XC, SX-135 XC

\* Standard feature on the SX-105 XC and SX-125 XC.







### Platform Control Box Cover

This accessory helps prevent loose debris from getting into the control box.

### CO Tool Tray

Designed to help eliminate clutter and potential tripping hazards by providing operators and workers with a convenient place to store their tools, fasteners and small materials in the platform.



### Aircraft Protection Package

To protect an aircraft or other sensitive work surfaces from damage, this package allows the boom platform to get up close with its foam-padded auxiliary rails, located top and sides, plus padded proximity-sensing rail underneath. If the sensing rail makes surface contact, all motion functions stop.

PART NO.	AVAILABLE ON	PART NO.	AVAILABLE ON	PART NO.	AVAILABLE ON*
Kit part numbers differ for different models. Please refer to www. GoGenieLift. com for part number information.	Z <sup>®</sup> -30/20 N & Z-30/20N RJ, Z-33/18, Z-34/22 series, Z-40/23N & Z-40/23N RJ, Z-45/25 series, Z-45 XC <sup>™</sup> , Z-60 DC & Z-60 FE, Z-62/40, Z-80/60, ZX <sup>™</sup> -135/70, S <sup>®</sup> -40/45 XC, S-65 XC, S-80 XC, S-85 XC, SX <sup>™</sup> - 105 XC*, SX-125 XC*, SX-135 X, SX-150, SX-180	1275089GT	All S boom lifts and all Z boom lifts from the Z-45 and up	Factory Fit	Z-30/20N, Z-34/22 series, Z-80/60, S-40/45 XC, S-80/85 XC, SX-105 XC, SX-125 XC, SX-135 XC

\* Standard feature on the SX-105 XC and SX-125 XC.

\* Platform size limitations based on model



# LIFT ^TOOLS

Genie<sup>®</sup> Lift Tools<sup>™</sup> accessories are productivity tools designed to make operators more efficient when working at height. These accessories also promote best practices for safe use and increased performance while operating Genie booms.



## Ope Cradle

This accessory reduces the risk of fatigue by providing a secure way to lift pipes when working from an S- or Zboom lift. Genie pipe cradles deliver stability and rigidity with a robust design which transfers the load away from the guard rails and onto the platform deck. The pipe cradle assembly mounts easily to the platform guardrails with U-bolts and rests on the floor of the platform when installed.



## Panel Cradle

For use lifting drywall, glass panes, plywood and other material that comes in panels up to 113.4 kg (250 lb). The panel cradle allows operators to place materials outside of the platform for access at height. Includes the cradle, two foam cushions and load retaining strap. The combined weight of attachment, panels, occupants and tools must not exceed the platform rated capacity.

PART NO.	AVAILABLE ON
56572GT - Kit	Z-30/20N, Z-34/22, Z-40/23N, Z-45/25, Z-45 XC <sup>™</sup> , Z-51/30J, Z-60 DC/FE, Z-62/40, Z-80/60, S-40 XC, S-45 XC, S-60X, S-60 J,
85300GT - Individual Pipe Cradle	S-60 TraX™, S-60 XC, S-65 TraX, S-65 XC, S-80 J, S-80X, S-80 XC, SX™-105 XC, SX- 125 XC, SX-135 XC, SX-150, SX-180

PART NO.	AVAILABLE ON
1299220GT - Kit*	Z-45 XC, Z-45 DC & Z-45 FE, Z-60 DC & Z-60 FE, Z-62/40, Z-80/60, S-40/45 XC, S-65 XC, S-65 TraX <sup>™</sup> , S-80/85 XC, SX-105 XC, SX-125 XC, SX-135 XC

\* Not compatible with the old style bolt-on platform toeboards. For platforms with bolt-on toeboards and for platforms manufactured before 2016, please use P/N 94493-SGT.



# 

As Genie<sup>®</sup> protective solutions continue to evolve, Genie Lift Guard<sup>™</sup> secondary guarding accessories provide additional operator protection while working at height. They are simple to use, and when used in conjunction with operator training required by industry standards worldwide, can enhance safe work practices on aerial jobsites.



### Contact Alarm

Engineered as an electronic secondary guarding system, the Genie Lift Guard Contact Alarm System stops boom functions and alerts ground personnel when an operator makes contact with the activation cable. This new feature is configured as a standard accessory on new Genie Z<sup>®</sup> and S<sup>®</sup> boom lifts, and it is retrofittable on booms dating back to 2006.



# Operator Protective Structure (OPS)

For use on 1.83 m (6 ft) or 2.44 m (8 ft) platforms, bolting directly to the platform, this secondary guarding device helps provide additional protection to the operator from overhead obstacles on a work site.

The Genie OPS is made of high strength tubular steel and allows for excellent visibility and work range.

PART NO.	AVAILABLE ON
1279134GT - 1.83 m (6 ft) - 2.44 m (8 ft) platform ALC1000	
1279135GT - 1.83 m (6 ft) - 2.44 m (8 ft) platform NON- ALC1000	All Capie C and Z Deem Lifte
1279136GT - 1.17 m (3 ft 10 in) - 1.42 m (4 ft 8 in) platform NON-ALC1000	All Genie S and Z Boom Lifts
1283807GT - 1.17 m (3 ft 10 in) platform, Z-33/18 only	

PART NO.	AVAILABLE ON
219158GT - 2.44 m (8 ft) and 1.83 m (6 ft) platform	S <sup>®</sup> -60 FE, S-60 J, S-85 XC <sup>™</sup> , S-80 J, SX <sup>™</sup> -105 XC, SX-125 XC, SX-135 XC, SX-150, SX-180, Z <sup>®</sup> -45 DC, Z-45 FE, Z-45/25J RT, Z-45 XC, Z-51/30J RT, Z-60 FE, Z-62/40, ZX <sup>™</sup> -135



Two options to choose from, full-height aluminum and half-height aluminium, these contemporary mesh accessories are engineered to help operators keep jobsite materials and tools from falling out of boom platforms while working at height. They can be fitted to any 1.83 m and 2.44 m (6 ft and 8 ft) platforms equipped with a side swing gate.



### Platform Full Mesh

Covers all four sides of the platform, from the floor to the top rail, without obstructing the lanyard attachment points on the rail.



## Datform Half Mesh

Designed to cover the lower half of the boom platform area, from the floor to the midrail.

PART NO.	AVAILABLE ON
1286622GT - 1.83 m (6 ft) full mesh	All boom lifts* fitting a 1.83 m (6 ft)
1283049GT - 2.44 m (8 ft) full mesh	or 2.44 m (8 ft) platform equipped with a side swing gate**

\* Except Z<sup>®</sup>-45/25J RT, SX<sup>™</sup>-150 and SX-180.

\*\* The addition of the Full Mesh option reduces platform entry points to one single-entry side swing gate.



\* Except Z-45/25J RT.





### Genie® Scissor Lift Accessories

We design Genie scissor lifts to bring safety and efficiency to every jobsite. Genie accessories are designed to enhance productivity for special applications when working at height.



### **⊘** Tech Pro<sup>™</sup> Link

Allows users to monitor a machine's gauges, including engine temperature, oil pressure, fuel levels and battery voltage, calibrate the machine, make speed adjustments during pre-operation inspection, get service alerts and reminders, track maintenance intervals, receive fault code information and so much more – all from the palm of your technician's hand.





## ᢙLift Tools<sup>™</sup> Pipe Cradle

Securely carry conduit, ducting and piping, up to 15 cm (6 in) in diameter. Featuring a nylon strap to hold material in place. Indoor use only.

### Cift Tools Panel Carrier

Holds your windows, dry wall and plywood. Max panel size 1.22 m (4 ft) high x 2.44 m (8 ft) wide. Installs quickly and easily. Indoor use only.

PART NO.	AVAILABLE ON	PART NO.	AVAILABLE ON		PART NO.	AVAILABLE ON
1276686GT	Genie GS <sup>™</sup> scissor lifts manufactured as of 2011 and equipped with SmartLink <sup>™</sup> control systems.	1298463GT - 97.5 kg (215 lb) capacity	GS-1530, GS-1532, GS-1930, GS-1932, GS-1932 XH, GS-2032		1298465GT (mini slabs) - 45 kg (100 lb) capacity	GS-1530, GS-1532, GS-1930, GS-1932, GS-1932 XH
	5/516115.	1298463GT - 45 kg (100 lb) capacity	GS-2632, GS-3232, GS-3246, GS-3246 XH, GS-4046	_	1298464GT (large slabs) - 45 kg (100 lb) capacity	GS-2032, GS-2632, GS-3232
		1298463GT - 201 kg (445 lb) capacity	GS-2046, GS-2646, GS-2646 XH		1298464GT (large slabs) - 90.7 kg (200 lb) capacity	GS-2046, GS-2646, GS-2646 XH, GS- 3246, GS-3246 XH, GS-4046





# LIFT ^TOOLS



### Observe and the second seco

Simple solution for storing small tools within reach. Installs on the upper or lower railing of scissor lifts, or on top of the platform support of  $GR^{T}s$ .



## Dift Tools Spill Guard

This option reduces the risk of costly hydraulic leaks, allowing you to work over sensitive surfaces without concern. This accessory can be field retrofitted in less than fifteen minutes. It only requires a one-time installation with easily replaceable absorbent pads.

PART NO.	AVAILABLE ON
1298461GT Scissors - 22 kg (50 lb) capacity	GS <sup>™</sup> -1530, GS-1532, GS-1930, GS-1932, GS-1932 XH, GS-2032, GS-2632, GS-3232, GS-2046, GS-2646, GS-2646 XH, GS-3246, GS-3246 XH, GS-4046

PART NO.	AVAILABLE ON
1304508GT	GS-1330m
Factory Fit	GS-1432m E- drive, GS-1932m E- drive, GS-1930/1932 E-drive, GS-2032 E-drive, GS-2046 E-drive, GS-2632 E-drive, GS-2646 E-drive, GS-3232 E-drive, GS-3246 E-drive, GS-4046 E-drive

### Genie® Aerial Work Platform Accessories

Genie<sup>®</sup> aerial work platforms are easy to use and cost effective, making them the first choice for a wide range of applications. Each model offers a variety of accessories to customize your machine.



### **⊘** Tech Pro<sup>™</sup> Link

Allows users to monitor a machine's gauges, including engine temperature, oil pressure, fuel levels and battery voltage, calibrate the machine, make speed adjustments during pre-operation inspection, get service alerts and reminders, track maintenance intervals, receive fault code information and so much more, all from the palm of your technician's hand.



### Aluminium Extension Deck Platform

Provides 51 cm (20 in) of horizontal outreach and a larger work area within the platform. Two entry versions available: sliding midrail or gate. Dimensions, stowed: 89 x 75 cm (35 x 29.5 in); extended: 140 x 75 cm (55 x 29.5 in).



#### ©⊗ Lift Tools<sup>™</sup> Work Tray

Designed to help eliminate clutter and potential tripping hazards by providing operators and workers with a convenient place to store their tools, fasteners and small materials in the platform.

PART NO.	AVAILABLE ON	AVAILABLE ON	PART NO.	AVAILABLE ON
1276686GT	All $GR^{\scriptscriptstyle TM}$ models	GR-12, GR-15, GR-20	1298462GT - 22 kg (50 lb) capacity	GR -12, GR-15, GR-20*

\* Available on models with serial number starting from GRP-60000 & GRR-10001. For previous models, please contact your Genie Parts Representative.





#### Ē Standard Base

Our most popular model, perfect for everyday applications.

**AVAILABLE ON\*** 

AWP<sup>™</sup>-20S AC & DC, AWP-25S AC & DC,

AWP-30S AC & DC, AWP-36S AC & DC, AWP-

40S AC & DC \* Indoor use only with standard indoor outriggers.

Outdoor use possible with optional outdoor

outriggers.



Ē Standard Platform

An excellent general-purpose platform, equipped with a sliding midrail, measuring 69 x 66 cm (27 x 26 in).



Standard on all AWP models\*, all IWP models, all GR<sup>™</sup> models

\* Except on AWP models with narrow base.



#### Ē Gated Standard Platform

Provides "step in" entry. Dimensions: 69 x 66 cm (27 x 26 in).

#### **AVAILABLE ON**

All AWP models and all IWP models



#### (F) Gated Narrow Platform

For access through standard ceiling tile. Dimensions: 66 x 51 cm (26 x 20 in).

PART NO.	AVAILABLE ON
Factory Fit	All AWP models* and all IWP models

\* Standard on AWP models with rough terrain base.



### ©Ø Fluorescent Tube Caddy

A convenient way to store multiple fluorescent lights in one location.

PART NO.	AVAILABLE ON
38226GT	All AWP, IWP and GR models, GRC <sup>™</sup> -12



#### ΘØ Descent Alarm Package

The flashing light and the alarm alert operators and personnel on the ground when the machine is descending.

PART NO.	AVAILABLE ON
100696-SGT	All AWP and IWP models
🕞 = Factory	Installed (A) = Aftermarke



### Genie<sup>®</sup> Material Lift Accessories

These versatile lifts offer a large selection of accessories providing the opportunity to create just the lift you need.



CO Standard Forks

Accommodate various loads for versatile lifting. Get an additional 53 cm (21 in) of lift by turning over and re-pinning the forks



CO Adjustable Forks

Widen from 28 to 76 cm (11.5 to 30 in) to accommodate diverse loads.



#### € Flat Forks

PART NO.

32566-SGT

Widen from 41 to 79 cm (16 to 31 in) to provide proper support, allow you to easily lift your load off of flat surfaces.

**AVAILABLE ON** 

SLA-5, SLA-10, SLA-15

PART NO.	AVAILABLE ON
37244-SGT	GL <sup>™</sup> -4, GL-8, GL-10, GL-12
32906GT	SLA <sup>™</sup> -5, SLA-10, SLA-15, SLA-20, SLA-25
35160GT	SLC <sup>™</sup> -12, SLC-18, SLC-24

PART NO.	AVAILABLE ON
32564-SGT	SLA-5, SLA-10, SLA-15, SLA-20, SLA-25
33543-SGT	SLC-12, SLC-18, SLC-24



### Fork Extensions

Insert onto standard forks for an additional 25 in (64 cm) of length

PART NO.	AVAILABLE ON
58158GT	All SLA, SLC and ST™



(C) (A)(C) (

Capable of lifting up to 500 lb (227 kg) at 14 in (36 cm) and up to 300 lb (136 kg) at 20 in (51 cm) of reach.

PART NO.	AVAILABLE ON
37086GT - Kit	
5143GT - Hook	GL-4, GL-8, GL-10, GL-12



### € Boom Option - SLA<sup>™</sup> & SLC<sup>™</sup>

Transforms your lift into a mobile, vertical crane or hoist to position tooling fixtures, circuit breakers, engines and more.

PART NO.	AVAILABLE ON
32567-SGT	All SLA and SLC





### COA Platform

Fits over the forks to handle odd-sized or heavy objects- no tools required for installation. Can also be used as a portable work table.

PART NO.	AVAILABLE ON
37148GT	GL <sup>™</sup> -4, GL-8, GL-10, GL-12
107165GT	SLA <sup>™</sup> -5, SLA-10, SLA- 15, SLA-20, SLA-25
35021GT	SLC <sup>™</sup> -12, SLC-18, SLC-24



### Captive Stabilizer

With patented "locking system provides additional lateral support for heavy loads.

PART NO.	AVAILABLE ON
37481GT	AII SLA
5159-SGT	All SLC



#### (D) (A) Aluminum Ladder

Attaching this sturdy accessory makes your Genie lift a combination lift truck and stepladder for increased access to lifting and installation tasks.

PART NO.	AVAILABLE ON
37249-SGT	GL-4 and GL-8
37250-SGT	GL-10
37251-SGT	GL-12



### **© (2)** Brake Option

Field-installable foot brakes are available for additional security.



Platform Cradle Package

Available as an accessory to handle oddly-shaped items.



€ A Stair Rollers

Built-in stair glides above the rear tyres provide easy handling over stairs and curbs.

PART NO.	AVAILABLE ON
37247-SGT	All GL
40669-SGT	LL <sup>™</sup> 5.5

PART NO.	AVAILABLE ON
20200GT	GH™ 3.8, GH 5.6, LL 5.5

PART NO.	AVAILABLE ON
5186GT	LL 5.5





### ©Ø Wheels and Casters

Wheel and caster options\* help customize your Genie® Lift to adapt to your jobsite floor and increase manoeuvrability.


PART NO.	AVAILABLE ON
6415GT - Standard Caster	GL series
57731GT - Pneumatic Caster	GL series
35571GT - Non-marking Caster	LL™ 5.5
57734GT - 4 Point Caster Option A	GL & SLC <sup>™</sup> series
57740GT - 4 Point Caster Option B	GL & SLA series
57787-SGT - Non-marking Standard Wheel	GL series & LL 5.5
80677GT - Pneumatic Wheel	GL series
40164GT - Kit**	GL series

\* For clarification on standard and optional features, see your Genie lift Operator's Manual.
\*\* Kit includes two front casters, 2 pneumatic back wheels and bracket



# 

Take control of your fleet with Genie Lift Connect<sup>™</sup> telematics. The Lift Connect program provides fleet managers and service managers with tools to maximize efficiency and minimize downtime. We also provide data in an easy to use portal or via your existing API.

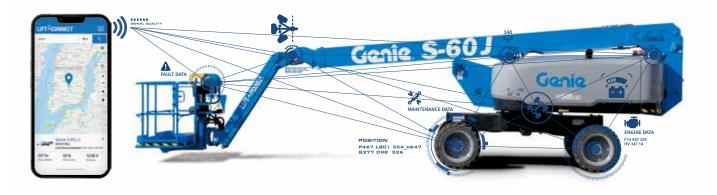

### € Connect

No matter what size equipment fleet you have, equipment management is something you do every day. Today's Genie<sup>®</sup> Lift Connect<sup>™</sup> telematics technology has evolved so that you can take action quickly to maximize productivity and minimize downtime.

Aftermarket Genie Lift Connect retrofit kits can be installed on Genie units equipped with a telematics-ready connector, dating back to 2015.

PART NO.	DESCRIPTION
1309419GT*	GENIE <sup>®</sup> LIFT CONNECT™ EMEARI RETROFIT KIT**

\* A Harness Kit should be added when ordering a Retrofit Kit. Harness Kits are machine and serial-number specific. Please verify the part number you need by visiting: https://www.genielift.com/en-gb/support/ lift-connect

\*\* The Retrofit Kit includes: Telematics module, installation hardware, activation flyer, 1 year subscription.

## ORANGE Subscription Renewal

Continue to leverage enhanced OEM data to reduce your service costs. Consume your data how you like either via an APO, Lift Connect Portal, Near me App and/or all options.

By renewing your subscription, you will be eligible for future data and value-added services enabled by Lift Connect.

PART NO.	GENIE LIFT CONNECT SUBSCRIPTION
1294987GT	1 YEAR EXTENSION
1294988GT	2 YEAR EXTENSION
1294989GT	3 YEAR EXTENSION
1294990GT	4 YEAR EXTENSION
1312797GT	1 YEAR EXTENSION + ACCESS MANAGER
1312798GT	2 YEAR EXTENSION + ACCESS MANAGER
1312799GT	3 YEAR EXTENSION + ACCESS MANAGER
1312800GT	4 YEAR EXTENSION + ACCESS MANAGER



# 



### Access Manager RFID Card

Secure access to your equipment with RFID cards. These are compatible with the Lift Connect Access Manager and can be programmed through the portal to restrict access to a machine unless authorized. Ensure that only properly trained operators will be operating equipment while opening your business to new rental opportunities.



#### C Access Manager

Improve jobsite security by being able to assign a unique code to an individual OR use an Access Manager RFID card. The Unit can only be started when operator enters an authorized code on the keypad. This option opens up new solutions and flexibility for managing equipment on large jobsites.


PART NO.	DESCRIPTION
1306830GT	APPLICABLE ON ALL MODELS THAT HAVE INSTALLED ACCESS MANAGER

PART NO.	AVAILABLE ON*
1311011GT	S®-40/45 XC <sup>™</sup> , S-60/65 XC, S-80/85 XC, Z®-60/37, S-60J, S-80J
1311012GT	SX®-105 XC, SX-125 XC, SX-135 XC, SX-150, SX-180, ZX®-135/70
1311275GT	GS®-1330 m, GS-2032, GS-2046, GS-1530, GS-1930, GS-1532, GS-1932, GS-2632, GS-3232, GS-2646, GS-3246
1311276GT	GS-4046, GS-4047, GS-4655
1306517GT	GR <sup>™</sup> , QS <sup>™</sup> , GRC <sup>™</sup>

\* For all other units, please consult with your Genie representative for accurate part numbers.



### Notes:

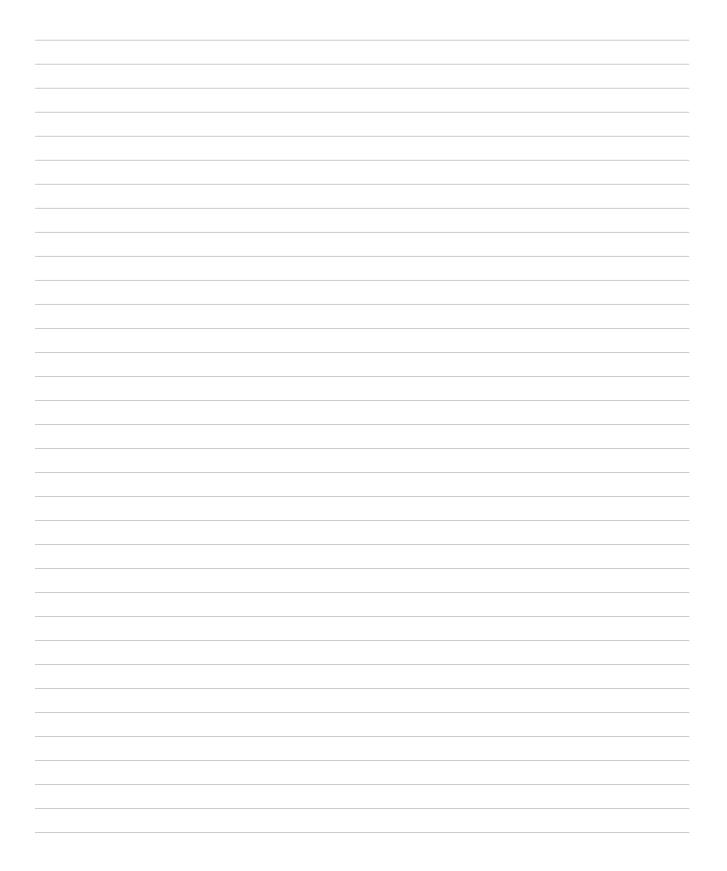



#### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · India · Italy · Japan · Korea · Mexico Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Europe, T.:+44 800 988 3739 (Toll Free for UK/Ireland), Fax +31 165 511 148 Middle East, Southern Africa, Russia and Turkey, T.: +971 4 399 0381

Effective Date: June 2022. Product specifications and prices are subject to change without notice of obligation. The video, audio, photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. 2022 Terex Corporation.



