

Genie® Superlift Advantage® SLA™ -5, SLA-10, SLA-15, SLA-20 & SLA-25

Specifications

Models	SLA-5	SLA-10	SLA-15	SLA-20	SLA-25
Working height - standard forks (forks down)	1.49 m	2.97 m	4.46 m	5.94 m	7.42 m
Working height - standard forks (forks up)	2.0 m	3.49 m	4.98 m	6.46 m	7.94 m
Working height - adjustable forks (forks down)	1.49 m	2.97 m	4.46 m	5.94 m	7.42 m
Working height - adjustable forks (forks up)	2.0 m	3.49 m	4.98 m	6.46 m	7.94 m
Working height - flat forks	1.49 m	2.97 m	4.46 m	-	-
Working height - boom ⁽³⁾	1.79 m	3.28 m	4.76 m	6.25 m	7.42 m
Working height - load platform ⁽²⁾ - forks down	1.49 m	2.97 m	4.46 m	5.94 m	7.42 m
Working height - load platform ⁽²⁾ - forks up	2.0 m	3.49 m	4.98 m	6.46 m	7.94 m
A Height - stowed	1.99 m				
B Standard base Length - stowed	0.74 m	0.74 m	0.74 m	0.74 m	0.79 m
C Length - operating	1.51 m	1.51 m	1.88 m	2.08 m	2.08 m
D Width - stowed ⁽¹⁾	0.80 m				
Width - with stabilizers lowered	1.85 m				

Productivity


18 in (46 cm) load center	454 kg	454 kg	363 kg	363 kg	295 kg
24 in (61 cm) load center	454 kg	454 kg	363 kg	272 kg	204 kg
42 in (107 cm) load center	159 kg	181 kg	227 kg	159 kg	113 kg

Power

Average cranks - per length unitStandard winch - carriage moving	41/m	41/m	41/m	41/m	41/m
Standard winch - mast moving	18/m	18/m	18/m	18/m	18/m

Weight and Floor Loading

Weight - Standard	98 kg	118 kg	151 kg	184 kg	204 kg
Weight - Straddle base	117 kg	137 kg	163 kg	-	-

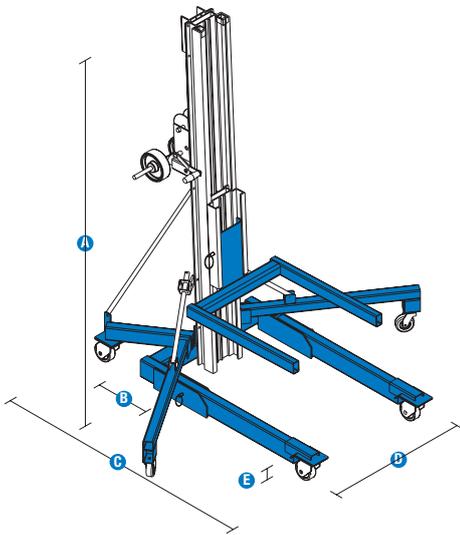

Load Handling Attachments	Dimensions	Weight
	METRIC	METRIC
Standard forks (l/w/d) ⁽⁴⁾	69/60/6 cm	18 kg
Standard fork size (each)	6/4 cm	
Adjustable forks assembly (l/w/d) ^{(3) (4)}	70/61-76/6 cm	24 kg
Adjustable fork size max (each)	6/4 cm	24 kg
Fork extensions detached (each) (l/w/d) ^{(3) (4)}	76/5/8 cm	2 kg
Fork extension attached (each) (l/w/d) ^{(3) (4)}	64/5/8 cm	2 kg
Flat forks (l/w/d) ⁽⁴⁾	81/41-79/3.8 cm	36 kg
Boom (l/w/d) ⁽³⁾⁽⁴⁾	46,61,81,112/4/15 cm	18 kg
Load platform (l/w/d) ^{(3) (4)}	70/58/7 cm	14 kg

(1) Outside dimensions.

(2) For use with standard and adjustable forks only.

(3) Measured from ground to bottom of shackle.

(4) Length/width/depth, from end of carriage and outside of forks

Genie® Superlift Advantage® SLA™-5, SLA-10, SLA-15, SLA-20 & SLA-25

SKU: Standard Model

- SLA-5, Standard base*
- SLA-5, Straddle base*
- SLA-10, Standard base*
- SLA-10, Straddle base*

* Build to Order

SKU: Standard Model

- SLA-15, Standard base*
- SLA-15, Straddle base*
- SLA-20, Standard base, Stabilizer set*
- SLA-25, Standard base, Stabilizer set*

Option availability		S	S+	BtO
Chassis	Rear transport wheel assembly			○
	Heavy-duty design			✓
	Portable compact design for easy transport and storage			✓
	Quick setup requires no tools			✓
	Stabilizer set (standard on SLA-20, SLA-25, not on Straddle base)			○
Mast	Mast brake			✓
	One-speed manual winch, locks load in place			✓
	Patented telescoping mast system			✓
	Strong and lightweight aluminum telescoping mast			✓
	Transport carriage lock			✓
Wheels	Two speed winch (SLA-15, SLA-20, SLA-25 only)			○
	4in/10cm non-marking front casters			✓
Attachments	5in/12cm rear casters with side brakes			✓
	Adjustable width forks			
	Boom			
	Load platform			
	Durable standard steel forks			✓
Attachments	Flat forks (SLA-5, SLA-10, SLA-15)			
	Fork extensions (use on Standard or Adjustable forks)			

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



Quick Setup



Truck Portable



Max Lift Capacity



Genie Genuine Accessories⁽¹⁾

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.