


Genie® GS™ -2669 RT, GS-3369 RT & GS-4069 RT


Specifications

| Models | GS-2669 RT | | GS-3369 RT | | GS-4069 RT | |
|--|-------------|--------|-------------|---------|------------|---------|
| Measurements | US | Metric | US | Metric | US | Metric |
| Working height max. ⁽¹⁾ | 32 ft 2 in | 10 m | 38 ft 8 in | 11.96 m | 46 ft 3 in | 14.30 m |
| A Platform height max. | 26 ft 2 in | 8 m | 32 ft 8 in | 9.96 m | 40 ft 3 in | 12.30 m |
| B Platform height - stowed | 4 ft 10 in | 1.47 m | 4 ft 10 in | 1.47 m | 5 ft 5 in | 1.65 m |
| C Platform length - outside | 9 ft 2 in | 2.79 m | 9 ft 2 in | 2.79 m | 9 ft 2 in | 2.79 m |
| Platform length - outside, extended | 14 ft 2 in | 4.32 m | 14 ft 2 in | 4.32 m | 14 ft 2 in | 4.32 m |
| Slide-out platform extension deck - length | 5 ft | 1.52 m | 5 ft | 1.52 m | 5 ft | 1.52 m |
| D Platform width - outside | 5 ft 3 in | 1.60 m | 5 ft 3 in | 1.60 m | 5 ft 3 in | 1.60 m |
| Toeboard height | 6 in | 15 cm | 6 in | 15 cm | 6 in | 15 cm |
| E Height - stowed (folding rails) ⁽²⁾ | 8 ft 6 in | 2.59 m | 8 ft 6 in | 2.59 m | 9 ft | 2.74 m |
| Height - stowed (rails lowered) | 6 ft 3.5 in | 1.92 m | 6 ft 3.5 in | 1.92 m | 6 ft 10 in | 2.08 m |
| F Length machine - stowed | 10 ft 3 in | 3.12 m | 10 ft 3 in | 3.12 m | 10 ft 3 in | 3.12 m |
| Length machine - stowed, extended | 14 ft 9 in | 4.50 m | 14 ft 9 in | 4.50 m | 14 ft 9 in | 4.50 m |
| Length machine - with outriggers | 12 ft 4 in | 3.76 m | 12 ft 4 in | 3.76 m | 12 ft 4 in | 3.76 m |
| G Width | 5 ft 9 in | 1.75 m | 5 ft 9 in | 1.75 m | 5 ft 9 in | 1.75 m |
| H Wheelbase | 7 ft 6 in | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in | 2.29 m |
| I Ground clearance (center) | 9.5 in | 24 cm | 9.5 in | 24 cm | 9.5 in | 24 cm |

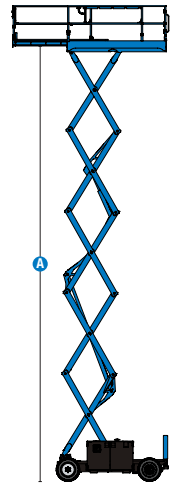

Productivity

| | 4/4 | | 4/2 | | 3/2 | |
|---|----------------|--------------|----------------|--------------|----------------|--------------|
| Max. platform occupancy (in/out) | 4/4 | | 4/2 | | 3/2 | |
| Lift capacity | 1,500 lb | 680 kg | 1,000 lb | 454 kg | 800 lb | 363 kg |
| Lift capacity - extension deck extended | 300 lb | 136 kg | 300 lb | 136 kg | 300 lb | 136 kg |
| Max. platform drive height | 26 ft 2 in | 8 m | 32 ft 8 in | 9.96 m | 40 ft 3 in | 12.3 m |
| Drive speed - stowed | 3.5 mph | 5.6 km/h | 3.5 mph | 5.6 km/h | 3.5 mph | 5.6 km/h |
| Drive speed - raised | 0.3 mph | 0.5 km/h | 0.3 mph | 0.5 km/h | 0.3 mph | 0.5 km/h |
| Gradeability - stowed ⁽³⁾ | 40% | | 35% | | 35% | |
| Turning radius - inside/outside | 83 in/181.2 in | 2.11 m/4.6 m | 83 in/181.2 in | 2.11 m/4.6 m | 83 in/181.2 in | 2.11 m/4.6 m |
| Lifting speed - raise/lower | 34/36 sec | | 39/34 sec | | 61/43 sec | |
| Tilt sensor activation (front to back/side to side) | 3°/2° | | 3°/2° | | 3°/2° | |
| Max. outrigger leveling (front to back /side to side) | 5.3°/11.7° | | 5.3°/11.7° | | 5.3°/11.7° | |
| Tires - Foam-filled rough terrain | 12×26 in | 30×66 cm | 12×26 in | 30×66 cm | 12×26 in | 30×66 cm |



Power

| Power | Diesel | | Diesel | | Diesel | |
|-------------------------|--------|--------|--------|--------|--------|--------|
| Fuel Tank | 10 gal | 37.9 L | 10 gal | 37.9 L | 10 gal | 37.9 L |
| Hydraulic tank capacity | 20 gal | 75.7 L | 20 gal | 75.7 L | 20 gal | 75.7 L |

Weight⁽⁴⁾ and Floor Loading⁽⁵⁾

| | | | | | | |
|--|----------|----------|----------|----------|-----------|-----------|
| Weight | 7,149 lb | 3,243 kg | 7,599 lb | 3,447 kg | 10,392 lb | 4,714 kg |
| Weight with outriggers | 7,942 lb | 3,603 kg | 8,352 lb | 3,807 kg | 11,185 lb | 5,074 kg |
| Tire load max. | 2,824 lb | 1,281 kg | 3,001 lb | 1,361 kg | 3,812 lb | 1,729 kg |
| Tire contact pressure - front, platform fully extended | 70.2 psi | 484 kPa | 74.7 psi | 515 kPa | 94.8 psi | 654 kPa |
| Occupied floor pressure | 169 psf | 8.11 kPa | 168 psf | 8.06 kPa | 214 psf | 10.24 kPa |

Sound and Vibration Levels

| | | | | | | |
|---|----------------------------|------------------------|----------------------------|------------------------|----------------------------|------------------------|
| Sound Pressure level (ground workstation) | 92.1 dBA | | 92.1 dBA | | 92.1 dBA | |
| Sound Pressure level (platform workstation) | 81.5 dBA | | 81.5 dBA | | 81.5 dBA | |
| Vibrations | < 8 ft 2 in/s ² | < 2.5 m/s ² | < 8 ft 2 in/s ² | < 2.5 m/s ² | < 8 ft 2 in/s ² | < 2.5 m/s ² |

(1) The metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.

(2) Based on RT tires; deduct 2 in/5.8 cm for turf and non-marking tires.

(3) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.

(4) Weight refers to standard configuration and may vary depending on options and/or country standards.

(5) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® GS™ -2669 RT, GS-3369 RT & GS-4069 RT

SKU: Standard Model

- **GS266901AF0007:** GS-2669 RT
- **GS266901AF0005:** GS-2669 RT, AC Generator (110V/60Hz, 3kW)

* Build to Order

SKU: Standard Model

- **GS336901AF0006:** GS-3369 RT
- **GS336901AF0004:** GS-3369 RT, Auto leveling outriggers
- **GS336901AF0008:** GS-3369 RT, 3kW AC Generator 110V/60Hz
- **GS406901AF0006:** GS-4069 RT

| Option availability | | S | S+ | BtO |
|---|---|---|----|-----|
| Power | 24.8 hp, 18.5kW Kubota D1105, Diesel, T4i/T4f, Stage IIIA/V, CN III | ✓ | ✓ | ✓ |
| | Cold weather package | | | ○ |
| Platform | Folding rails, Full-height swing gate | ✓ | ✓ | ✓ |
| | Single slide-out extension deck | ✓ | ✓ | ✓ |
| | Air line to platform | | | ○ |
| | 3kW AC Generator, 110V/50Hz | | | ○ |
| | AC power to platform | ✓ | ✓ | ✓ |
| | Diamond plate platform deck | ✓ | ✓ | ✓ |
| | Electronic horn | ✓ | ✓ | ✓ |
| | Lanyard attachment points | ✓ | ✓ | ✓ |
| | Platform control guard (PCON) | ✓ | ✓ | ✓ |
| | Platform control with fault indicator | ✓ | ✓ | ✓ |
| | Platform load sense system | ✓ | ✓ | ✓ |
| | Proportional drive and lift | ✓ | ✓ | ✓ |
| | Self-closing entry gate | ✓ | ✓ | ✓ |
| Chassis | Lift Connect Telematics | | ○ | ○ |
| | Lift Connect with Access Manager upgrade | | ○ | ○ |
| | Biodegradable hydraulic oil | | | ○ |
| | Cold weather hydraulic oil | | | ○ |
| | Rough Terrain, foam-filled tires | ✓ | ✓ | ✓ |
| | Rough Terrain, foam-filled, non-marking tires | | ○ | ○ |
| | Auto leveling hydraulic outriggers | | | ○ |
| | Dual LED flashing beacons | ✓ | ✓ | ✓ |
| | 4 wheel drive | ✓ | ✓ | ✓ |
| | Active oscillating axle | ✓ | ✓ | ✓ |
| | Descent, tilt and motion alarm | ✓ | ✓ | ✓ |
| Dual wheel multi-disc brakes | ✓ | ✓ | ✓ | |
| High floatation, foam filled tires (GS-2669, GS-3369) | ✓ | ✓ | ✓ | |

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



4 Wheel Drive



Full Height Drive



Swing-Out Engine Tray



Genie Genuine Accessories⁽¹⁾

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.