


# Self-Propelled Scissor Lifts

## GS™ -1432m E-Drive & GS-1932m E-Drive

### Specifications

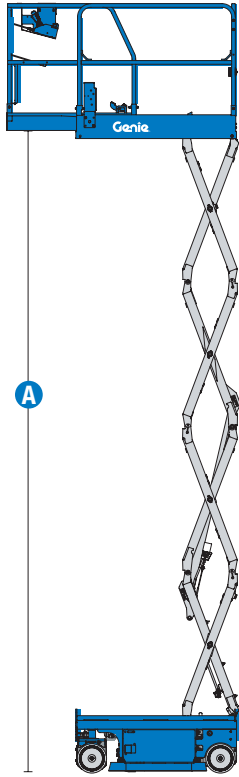

Models	GS-1432m E-Drive		GS-1932m E-Drive	
Measurements	US	Metric	US	Metric
Working height maximum - indoor <sup>1</sup>	20 ft 1 in	6.30 m	24 ft 2 in	7.55 m
- outdoor <sup>1</sup>	18 ft	5.66 m	21 ft	6.57 m
<b>A</b> Platform height maximum - indoor	14 ft 1 in	4.30 m	18 ft 2 in	5.55 m
- outdoor	12 ft	3.66 m	15 ft	4.57 m
<b>B</b> Platform height stowed	2 ft 6 in	0.78 m	2 ft 10 in	0.87 m
<b>C</b> Platform length - outside	4 ft 7 in	1.40 m	4 ft 7 in	1.40 m
- extended	6 ft 7 in	2.00 m	6 ft 7 in	2.00 m
Roll-out platform extension deck	2 ft	0.6 m	2 ft	0.6 m
<b>D</b> Platform width - outside	2 ft 6 in	0.77 m	2 ft 6 in	0.77 m
Guardrail height	3 ft 7 in	1.1 m	3 ft 7 in	1.1 m
Toeboard height	6 in	15 cm	6 in	15 cm
<b>E</b> Height-stowed - fixed rails	6 ft 2 in	1.88 m	6 ft 5 in	1.97 m
- folding rails	4 ft 11 in	1.49 m	5 ft 2 in	1.58 m
<b>F</b> Length-stowed	4 ft 7 in	1.4 m	4 ft 7 in	1.4 m
Length-stowed extended	6 ft 7 in	2 m	6 ft 7 in	2 m
<b>G</b> Width	32 in	0.81 m	32 in	0.81 m
<b>H</b> Wheelbase	3 ft 8 in	1.12 m	3 ft 8 in	1.12 m
<b>I</b> Ground clearance-center	2.8 in	7 cm	2.8 in	7 cm
- with pothole guards deployed	0.75 in	1.9 cm	0.75 in	1.9 cm

### Productivity

Maximum platform occupancy (in/out)	2/1		2 / 1	
Lift capacity	500 lbs	227 kg	500 lbs	227 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg
Drive height	full height		full height	
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability - stowed <sup>2</sup>	25%		25%	
Turning radius - inside	zero		zero	
Turning radius - outside	4 ft 6 in	1.37 m	4 ft 6 in	1.37 m
Raise / lower speed	19 / 20 sec		26 / 20 sec	
Tilt sensor activation - front to back	3°		3°	
- side to side	1.5°		1.5°	
Controls	proportional		proportional	
Drive	<b>E-drive: dual AC electric drive, front wheel</b>			
Brakes	<b>Dual electric, front wheel</b>			
Tires - solid non-marking	10 x 3 in	25.4 x 7.62 cm	10 x 3 in	25.4 x 7.62 cm

### Power

Power source	24 V DC
Hydraulic system capacity	1.5 gal / 5.7 L

### Weight<sup>3</sup> / Floor Loading<sup>4</sup>

Weight - ANSI, CSA, CE	1,984 lbs	900 kg	2,600 lbs	1,179 kg
Maximum wheel load	937 lbs	425 kg	1,257 lbs	570 kg
Tire contact pressure	143 psi	988 kPa	164 psi	1,133 kPa
Occupied floor pressure	203 psf	9.73 kPa	254 psf	12.14 kPa

### Standards Compliance



ANSI A92.20, CSA B354.6, CE EN280, AS 1418.10

<sup>1</sup> The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

<sup>2</sup> Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings.

<sup>3</sup> Weight will vary depending on options and/or country standards.

<sup>4</sup> Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

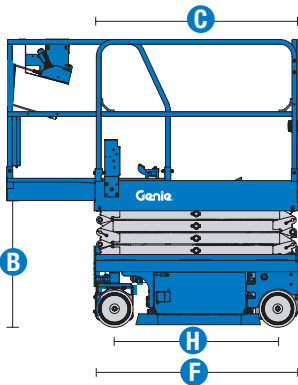

# Self-Propelled Scissor Lifts

## GS™ -1432m E-Drive & GS-1932m E-Drive

### Features

#### Standard Features

##### Measurements

###### GS-1432m

- 20 ft 1 in (6.3 m) working height
- Up to 500 lbs (227 kg) lift capacity

###### GS-1932m

- 24 ft 2 in (7.55 m) working height
- Up to 500 lbs (227 kg) lift capacity

##### Productivity

- Fixed guardrails with half-height swing gate
- 24 in (0.6 m) extension deck
- Drive at full height
- E-drive (AC electric drive system)
- SmartLink - dual zone control
- Proportional lift and drive
- Platform load sense system
- Platform control guard
- Universal 27A smart charger
- Rear recessed charger receptacle
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Manual and electric brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards
- Tilt sensor with audible alarm
- Dual flashing LED beacons

#### Options & Accessories

##### Productivity Options

- Air line to platform
- Automotive horn
- Lift Tools™ Work Tray
- Lift Guard™ Spill Guard

##### Power Options

- Power inverter (120 V / 60 hz)
- AGM maintenance free batteries
- Drive cutout while charging



#### Genie United States

6464 185th Ave. NE  
Redmond, WA 98052  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By:



Effective Date: August, 2021. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2021 Terex Corporation.