

Genie® GTH™ -5519

Specifications

Models	GTH-5519	
Measurements	US	METRIC
Maximum lift height	18 ft 10 in	5.74 m
Maximum forward reach	11 ft 3 in	3.43 m
Reach at maximum height	1 ft 10 in	0.56 m
A Height, stowed	6 ft 6 in	1.98 m
B Length, stowed (without forks)	12 ft 3 in	3.73 m
Width	5 ft 11 in	1.80 m
C Wheelbase	7 ft 6 in	2.29 m
D Ground clearance, center	1 ft 2 in	0.36 m
E Ground clearance, axle	10 in	0.25 m
Fork cross section	1.6×4 in	40×100 mm

Productivity

Maximum lift capacity	5,500 lb	2,495 kg
Lift capacity at maximum height	4,400 lb	1,996 kg
Lift capacity at maximum reach	1,900 lb	862 kg
Drive speed	15 mph	24 km/h
Draw bar pull	7,716 lb	3,500 kg
Turning radius, outside (4WS)	11 ft	3.35 m
Auxiliary hydraulic flow	17 gpm	64 lpm
Auxiliary hydraulic pressure	3,918 psi	270 bar
Tires, standard size	12×16.5 in, 10 ply	0.30×0.42 m, 10 ply



Power

Power source	Deutz TCD 2.9	Deutz TCD 2.9
Electrical system voltage	12V	
Alternator	95 amp	
Battery	720 CCA 0°F (-18°C)	
Hydraulic tank capacity	18.5 gal	70 L
Hydraulic system capacity (w/tank)	31.7 gal	120 L
Fuel tank capacity	15.8 gal	59.8 L

Weight

Weight*	10,360 lb	4,700 kg
---------	-----------	----------

Range of motion GTH-5519

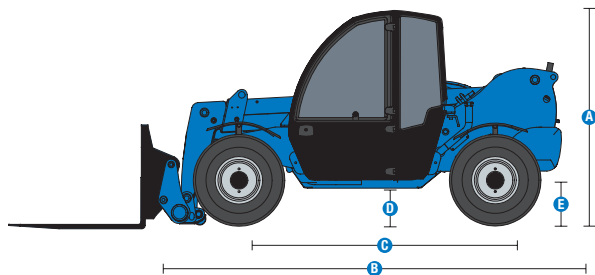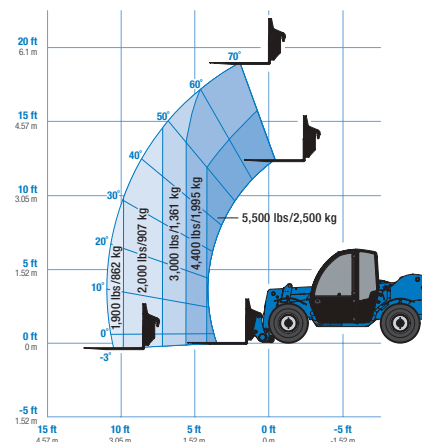

(1) Weight will vary depending on options and/or country standards.

(2) Load ratings vary depending on attachment.

Genie® GTH™-5519

EOC: Easy Order Configurations

- **GTH5519 EOC 1.0:** Cab with A/C, 74hp Deutz T4f, Mech Hyd Couplings & Beacon
- **GTH5519 EOC 2.0:** Cab with A/C, 74hp Deutz T4f, Worklights, Mech Hyd Couplings & Beacon
- **GTH5519 EOC 3.0:** Canopy, 74hp Deutz T4f, Mech Hyd Couplings & Beacon
- **GTH5519 EOC 4.0:** Canopy, 74hp Deutz T4f, Worklights, Mech Hyd Couplings & Beacon
- **GTH5519 EOC 5.0:** Canopy Front & Top Glass, 74hp Deutz T4f, Roadlights, Mech Hyd Couplings & Beacon

Option availability		EO	FtO	BtO
Cab	Canopy ROPS/FOPS	✓	✓	✓
	Canopy Front & Top Glass	✓	✓	✓
	Closed cab: AC, heater, defrost, wipers, washer, split door	✓	✓	✓
	Rear proximity alarm with back-up camera and display			✓
	3in/7.6cm high visibility red retractable seat belt	✓	✓	✓
	Adjustable suspended seat	✓	✓	✓
	Backup alarm	✓	✓	✓
	Full gauge cluster with engine diagnostics	✓	✓	✓
	Fully proportional boom and auxiliary hydraulic controls	✓	✓	✓
	Machine level indicator	✓	✓	✓
	Mirrors - LH canopy mounted and RH chassis mounted	✓	✓	✓
	Multi-function joystick controller	✓	✓	✓
	Power steering	✓	✓	✓
	RH steel mesh screen	✓	✓	✓
	Tilt steering wheel	✓	✓	✓
	Top glass	✓	✓	✓
Chassis	74 hp, Deutz TCD 2.9, T4f, Side-mounted engine	✓	✓	✓
	Flashing Beacon	✓	✓	✓
	Work lights: High output LED cab, boom, rear	✓	✓	✓
	Road and work lights: High output LED front, cab, boom, rear	✓	✓	✓
	Electric oil pan heater		✓	✓
	Lift Connect Telematics		✓	✓
	Lift Connect with Access Manager upgrade		✓	✓
	Foam filled Enduro A/T tires	✓	✓	✓
	Air Filled Rough terrain Tires		✓	✓
	Solid rough terrain tires		✓	✓
	Non-marking Foam-filled Enduro tires		✓	✓
	Air-filled turf tires		✓	✓
	3-mode steering (2-wheel, 4-wheel and crab) with limited slip front differential	✓	✓	✓
	Cold start intake glow plugs	✓	✓	✓
	Fenders set of four	✓	✓	✓
	Full time 4WD with front limited slip differential (LSD)	✓	✓	✓
	Internal multiple wet disc brakes	✓	✓	✓
	Spring applied, hydraulic release parking brake	✓	✓	✓
Boom	Telematics-ready	✓	✓	✓
	Variable speed hydrostatic drive	✓	✓	✓
	Genie manual Quick-Attach (QA) system	✓	✓	✓
	Auxiliary hydraulic circuit (18.5 GPM)	✓	✓	✓
	Boom angle indicator	✓	✓	✓
	Lifting shackle at boom tip	✓	✓	✓
	Self-leveling fork frame	✓	✓	✓

■ EO Easy Order
■ FtO Finish to Order
■ BtO Build to Order



Compact Footprint



Lift Shackle



Material Handling Attachments



GTH Attachments

- Universal skid steer adapter
- QA Bucket 0.5yd³/0.38m³, 66in/1.67m
- Scrap Bucket 0.83yd³/0.63m³, 78in/2m
- QA Carriage 48in/1.2m
- QA Fork positioner carriage 48in/1.2m
- QA Side shift carriage 48in/1.2m
- QA Rotate carriage 48in/1.2m
- QA Truss boom, 6ft/1.80m
- Cubing tines 48in (2×2×48in)/(0.05x.05×1.2m) x 6
- Pallet forks 48in (2×4×48in)/(0.05x.1×1.2m) x 2
- Pallet forks 60in (2×4×60in)/(0.05x.1×1.5m) x 2
- Pallet forks 72in (2×4×72in)/(0.05x.1×1.8m) x 2
- Auger with Plumb Alignment System (3K ft-lb torque)
- Auger with Plumb Alignment System (5K ft-lb torque)

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

08/26

