

Genie® SX™ -135 XC™

Specifications

| Models | SX-135 XC | |
|-------------------------------------------------|-------------|---------|
| Measurements | US | Metric |
| Working height max.(1) | 141 ft | 43.15 m |
| Platform height max. | 135 ft | 41.15 m |
| Horizontal reach max. | 90 ft | 27.43 m |
| Below ground reach | 19 ft 8 in | 6.00 m |
| A Platform length | 3 ft | 0.91 m |
| B Platform width | 8 ft | 2.44 m |
| C Height - stowed | 10 ft | 3.05 m |
| D Length - stowed | 64 ft 10 in | 19.76 m |
| D Length - storage/transport (jib tucked under) | 43 ft 7 in | 13.28 m |
| E Width (axles retracted) | 8 ft 2 in | 2.49 m |
| E Width (axles extended) | 12 ft 11 in | 3.94 m |
| F Wheelbase (axles retracted) | 13 ft 6 in | 4.11 m |
| F Wheelbase (axles extended) | 13 ft 6 in | 4.11 m |
| G Ground clearance - center | 15 in | 0.38 m |
| H Height under counterweight | 4 ft 1 in | 1.24 m |

Productivity

| | | |
|--------------------------------------------------------|-----------------------|---------------|
| Lift capacity max. - unrestricted | 660 lb | 300 kg |
| Lift capacity max. - restricted | 1,000 lb | 454 kg |
| Number of Platform Occupants (restricted/unrestricted) | 3/2 | |
| Platform rotation | 160° | |
| Jib length | 18/30 ft | 5.48/9.14 m |
| Vertical jib rotation (up/down) | 130° | |
| Turntable rotation | 360° | |
| Turntable tailswing (axles retracted) | 3 ft 9 in | 1.14 m |
| Turntable tailswing (axles extended) | 5 ft 7 in | 1.70 m |
| Drive speed - stowed | 2.7 mph | 4.3 km/h |
| Drive speed - raised | 0.4 mph | 0.65 km/h |
| Gradeability - stowed ⁽²⁾ | 35% | |
| Tilt sensor activation (front to back/side to side) | 4.5° / 4.5° | |
| Turning radius - inside/outside (axle retracted) | 26 ft 4 in/32 ft 8 in | 8.03 m/9.96 m |
| Turning radius - inside/outside (axle extended) | 9 ft 6 in/20 ft 3 in | 2.90 m/6.17 m |
| Tires | 445D50/710 | |

Power

| | | |
|-------------------------|--------|-------|
| Power | Diesel | |
| Hydraulic tank capacity | 60 gal | 227 L |
| Fuel tank capacity | 40 gal | 151 L |



Weight(3) and Floor Loading⁽⁴⁾

| | | |
|---------------------------------------------------|------------------|----------------------|
| Weight | 46,900 lb | 21,273 kg |
| Tire contact pressure | 130 psi | 896 kPa |
| Occupied floor pressure, axles retracted/extended | 351 psf/ 222 psf | 16.79 kPa/ 10.62 kPa |

Sound and Vibration Levels

| | |
|---------------------------------------------|------------------------|
| Sound Pressure level (ground workstation) | 91 dBA |
| Sound Pressure level (platform workstation) | 75 dBA |
| Vibrations | < 2.5 m/s ² |

Range of motion SX-135 XC

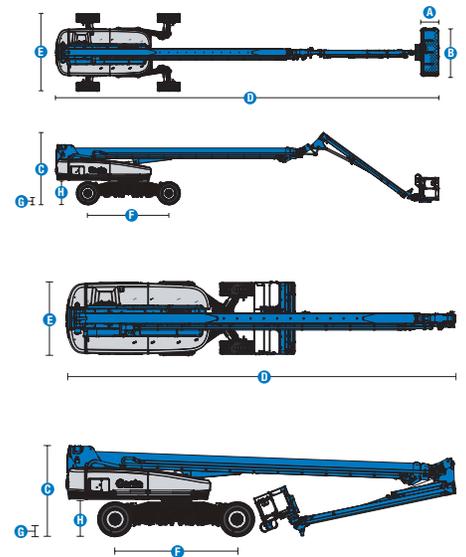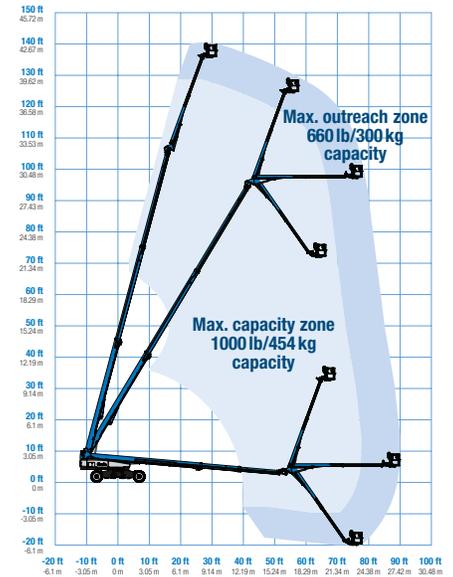

(1) The metric equivalent of working height adds 2 m to platform height. The imperial equivalent adds 6 ft to platform height.

(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.

(3) Weight refers to standard configuration and may vary depending on options and/or country standards.

(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® SX™ -135 XC™

SKU: Standard Model

- **SX135XC1AF0028:** SX-135 XC, 4WD
- **SX135XC1AF0029:** SX-135 XC, 12kW Welder Ready, 4WD

* Build to Order

| Option availability | S | S+ | BtO |
|-------------------------------------------------------------------------------|---|----|-----|
| Power | | | |
| 74 hp, 55 kW, Deutz TD2.9L, Turbo Diesel, T4f | ✓ | ✓ | ✓ |
| Cold weather package | | | ○ |
| Diesel air intake pre-cleaner | | | ○ |
| Positive air shutdown system | | | ○ |
| Anti-restart engine protection | ✓ | ✓ | ✓ |
| Auto engine fault shutdown | ✓ | ✓ | ✓ |
| In cylinder glow plug (diesel only) | ✓ | ✓ | ✓ |
| Platform | | | |
| 6ft/1.83m dual-entry platform with side swing gate | | | ○ |
| 8ft/2.44m tri-entry platform with side swing gate | ✓ | ✓ | ✓ |
| Dual axis joystick steering | ✓ | ✓ | ✓ |
| Thumb rocker steering | | | ○ |
| Air line to platform | | | ○ |
| Control box covers | | ○ | ○ |
| Lift Guard Full Mesh panels | | | ○ |
| Lift Guard Half Mesh panels | | | ○ |
| Light Package: drive and work lights | | ○ | ○ |
| Platform auxiliary top rail | | | ○ |
| 3kW AC Generator, 110V/50Hz | | | ○ |
| 3kW AC Generator, 220V/50Hz | | | ○ |
| 12kW Welder Ready AC Generator | | | ○ |
| 4 Steering modes | ✓ | ✓ | ✓ |
| 660lb/300kg & 1000lb/454kg dual load capacity with automatic envelope control | ✓ | ✓ | ✓ |
| Drive enable system | ✓ | ✓ | ✓ |
| Horn | ✓ | ✓ | ✓ |
| Lift Guard Contact Alarm | ✓ | ✓ | ✓ |
| Lift Guard Lanyard Alert | | | ○ |
| Lift Guard Lanyard Alert Advanced | | | ○ |
| Lift Tools Work Tray | ✓ | ✓ | ✓ |
| Platform load sense system | ✓ | ✓ | ✓ |
| Proportional controls | ✓ | ✓ | ✓ |
| Self-leveling platform | ✓ | ✓ | ✓ |
| Chassis | | | |
| Telematics-ready connector | ✓ | ✓ | ✓ |
| Lift Connect Telematics | ✓ | ✓ | ✓ |
| Lift Connect with Access Manager upgrade | | ○ | ○ |
| Biodegradable hydraulic oil | | | ○ |
| Cold weather hydraulic oil | | | ○ |
| Fire resistant hydraulic oil | | | ○ |
| Rough terrain, foam-filled tires | ✓ | ✓ | ✓ |
| Hostile environment kit | | | ○ |
| 2 speed wheel motors | ✓ | ✓ | ✓ |
| Alarm package: includes flashing beacon and travel alarm | ✓ | ✓ | ✓ |
| Chassis tilt lift and drive function cut-out | ✓ | ✓ | ✓ |
| Descent, tilt and motion alarm | ✓ | ✓ | ✓ |
| Dual battery system | ✓ | ✓ | ✓ |
| Hour meter | ✓ | ✓ | ✓ |
| Hydraulic oil cooler | ✓ | ✓ | ✓ |
| Mini XChassis extendable axles | ✓ | ✓ | ✓ |
| Tech Pro Link connector | ✓ | ✓ | ✓ |

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options




Jib-Extend
18-30ft/5.48-9.14m



Outreach > 90ft/27m



Mini XChassis

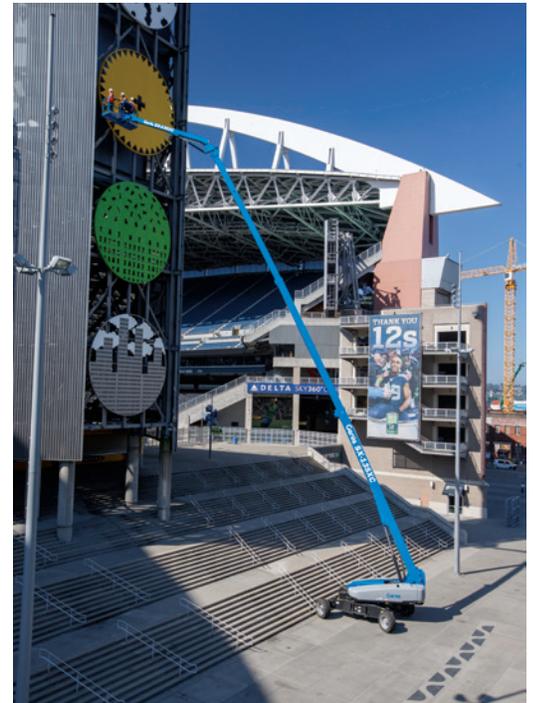

Genie Genuine Accessories⁽¹⁾

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.